



NAMUR POINTER ADAPTER  
(SEE DWG. S01-02-01 FOR DETAILS)

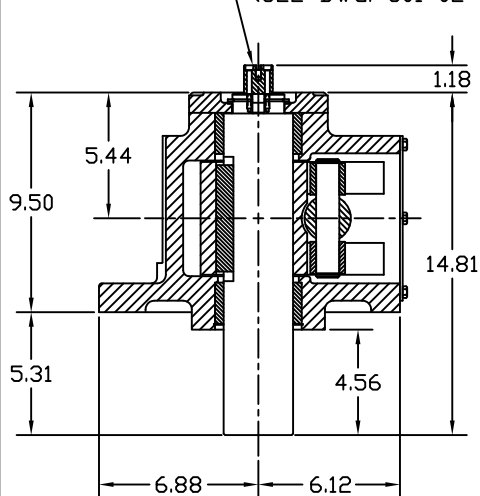


### SECTION A-A

YOKE SHOWN AT MID-STROKE  
POINTER OMITTED FOR CLARITY


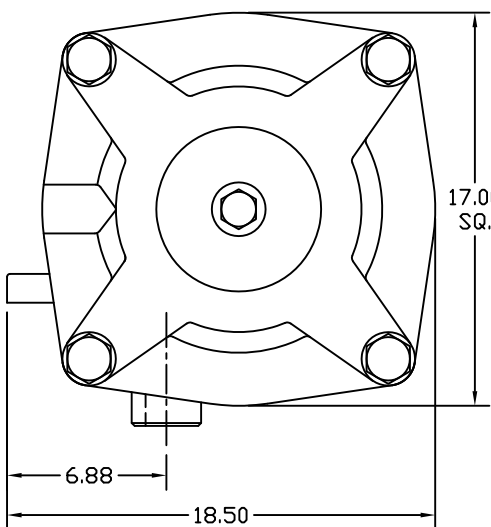


3.000/2.994 DIAMETER SHAFT  
3/4 SQ. x 3.88 LONG KEYWAY  
W/ .031 RADIUS INSIDE KEYWAY CORNERS  
(TO BE USED W/ 3/4" x 3 13/16" KEY)

3/4-10 UNC TAP x 1.18 DEEP  
(8) PLACES AS SHOWN ON  
11.73 DIAMETER BOLT CIRCLE

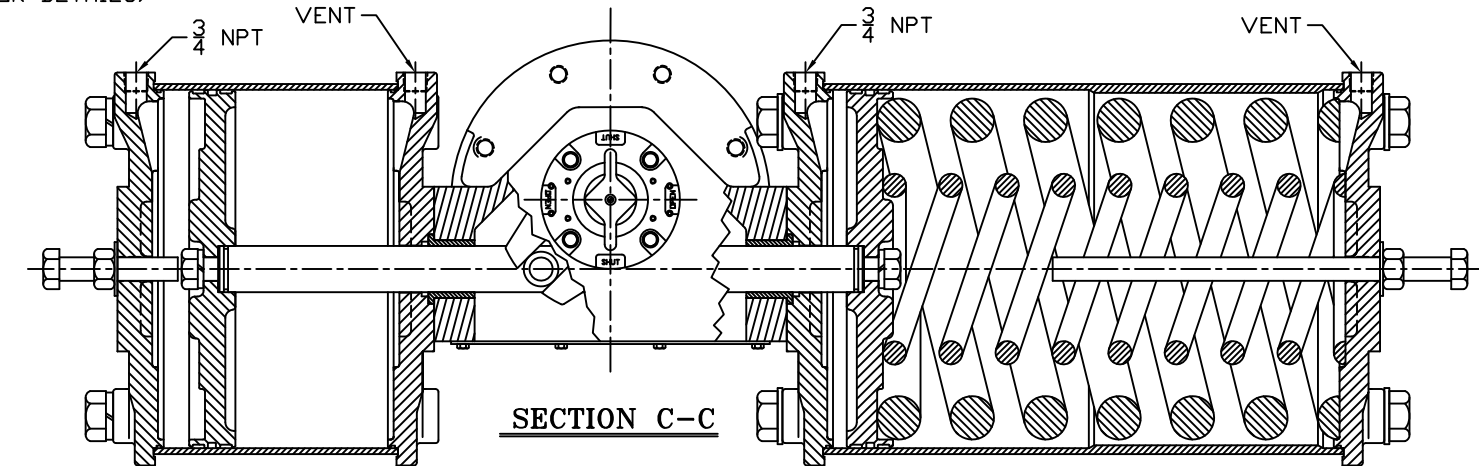

1.84  
REF.

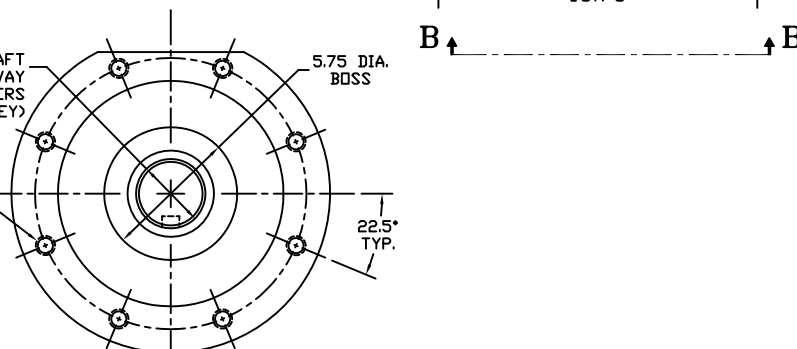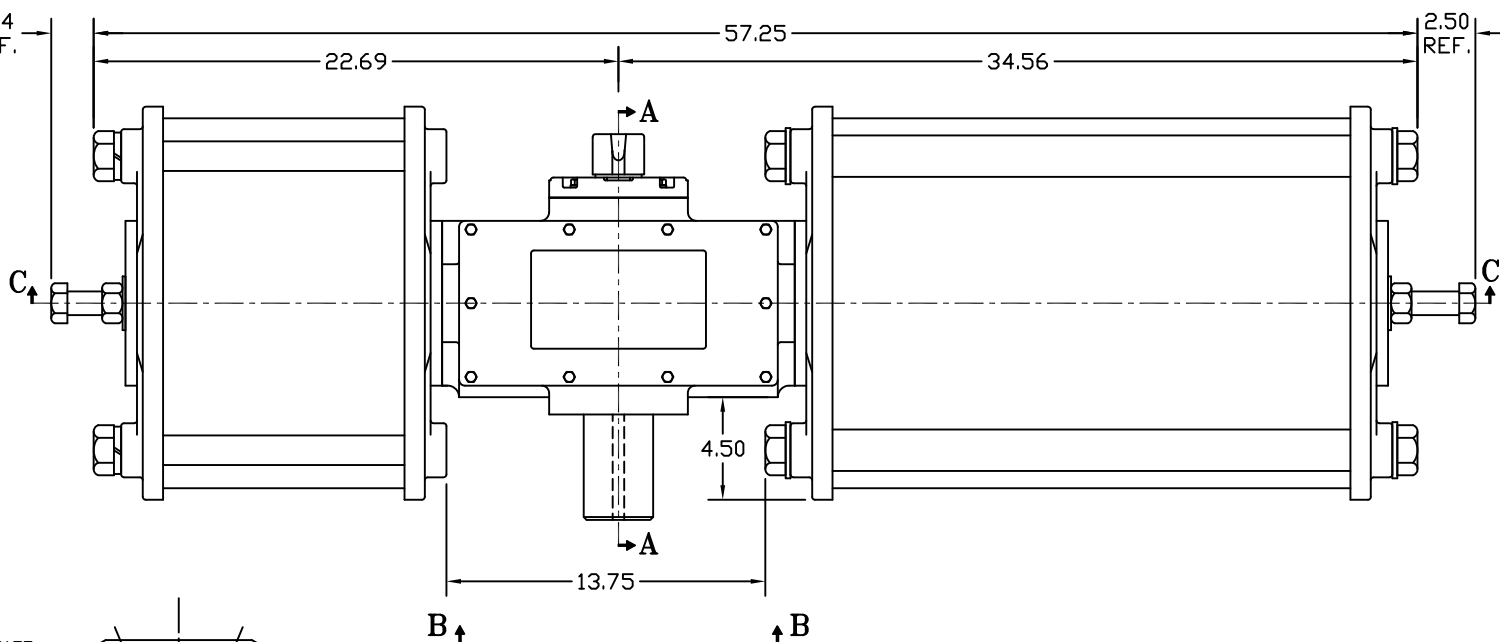

### View b-b

ISO F30 MOUNTING PATTERN

REV	DESCRIPTION	CAW	CHK	APR	DATE
E	UPDATED VIEW B-B	CAW			15/06/13
D	UPDATED VIEW B-B & SECTION A-A	CAW			10/12/10
C	UPDATED VIEW B-B & SECTION A-A	CAW			10/12/10
B	UPDATED CYLINDER LENGTH TO CANTED	CAW			10/12/10
REV	CHANGE	BY	CHK	APR	DATE

MORIN BIRMINGHAM, AL					
MODEL S-1150U-S000 ACTUATOR					
DRAWN BY BDC	DATE 1/17/01	CHECKED BY	DATE	APPROVED BY	DATE
SCALE FIT	REVISION E	DRAWING NO. S30S004E			
SHEET 1 OF 1	FIG. SIZE E				