

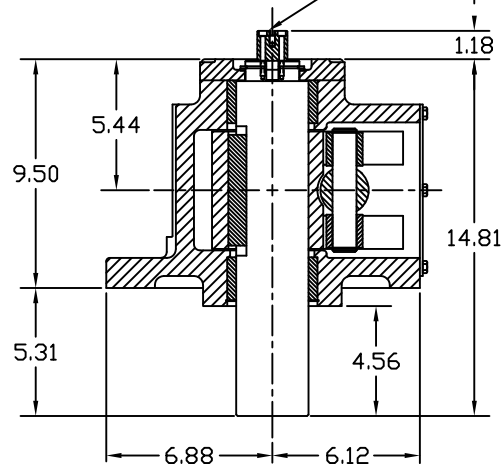
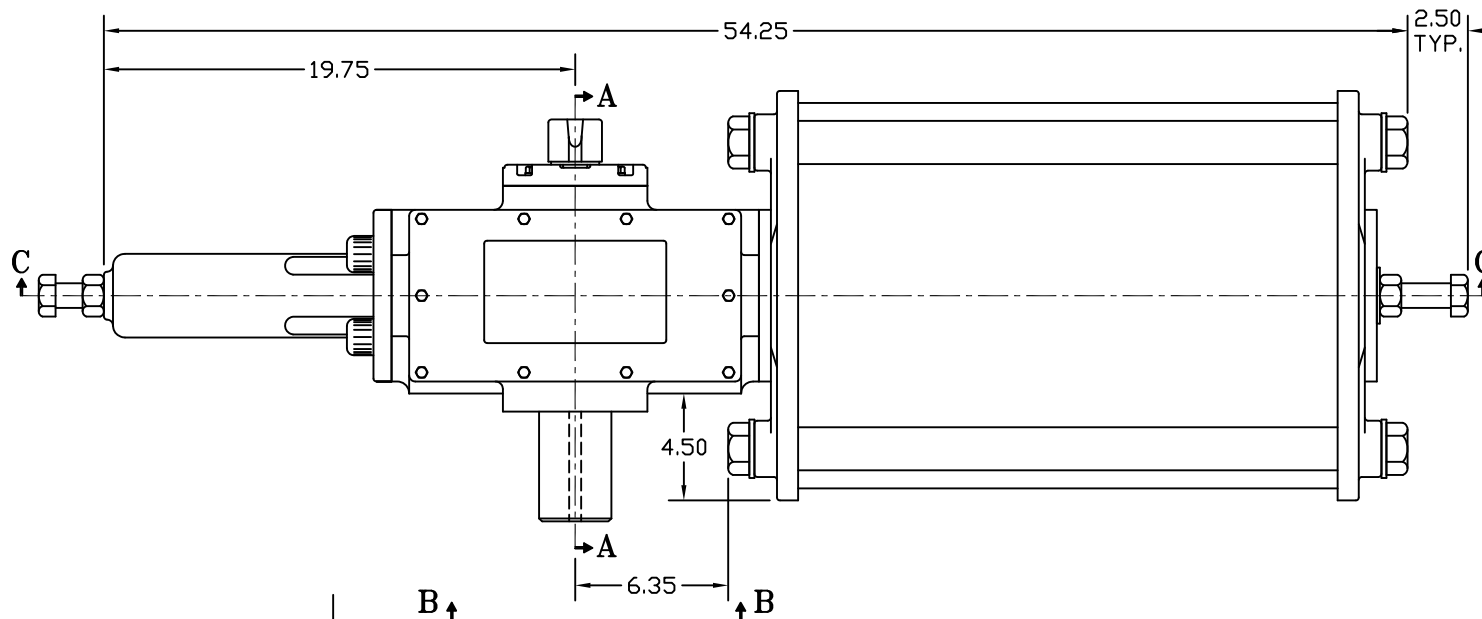


NAMUR POINTER ADAPTER
(SEE DWG. S01-02-01 FOR DETAILS)

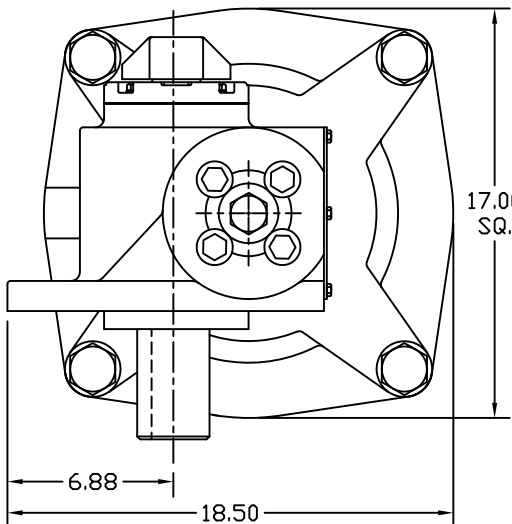


SECTION A-A

YOKE SHOWN AT MID-STROKE
POINTER OMITTED FOR CLARITY

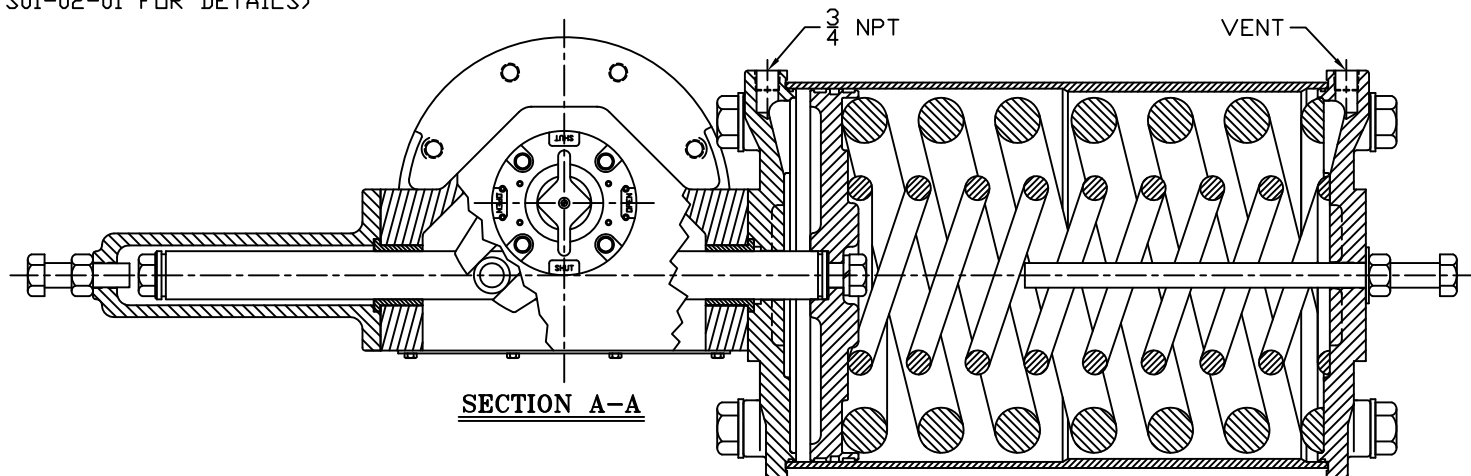

3.000/2.994 DIAMETER SHAFT
3/4 SQ. x 3.88 LONG KEYWAY
W/ .031 RADIUS INSIDE KEYWAY CORNERS
(TO BE USED W/ 3/4" x 3 13/16" KEY)

3/4-10 UNC TAP x 1.18 DEEP
(8) PLACES AS SHOWN ON
11.73 DIAMETER BOLT CIRCLE

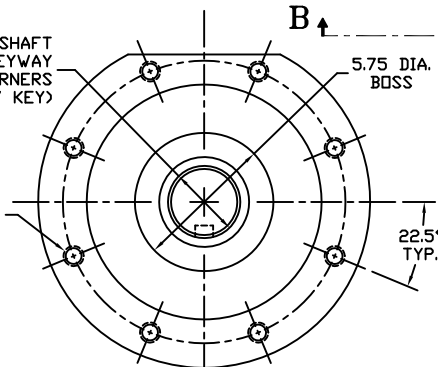

View b-b

ISO F30 MOUNTING PATTERN

REV	DESCRIPTION	BY	CHK	APR	DATE
D	UPDATED VIEW B-B	CAW			6/6/13
C	UPDATED VIEW B-B & SECTION A-A	CAW			6/21/11
B	UPDATED VIEW B-B & SECTION A-A	CAW			6/21/11
	CHANGE	BY	CHK	APR	DATE

MORIN BIRMINGHAM, AL					
MODEL S-575U-S000 ACTUATOR					
DRAWN BY	DATE	CHECKED BY	DATE	APPROVED BY	DATE
BDC	1/17/01				
SCALE	HALF	REVISION	D	DRAWING NO.	
SHEET	1 OF 1	DWG. SIZE	E		
					S30S002D