
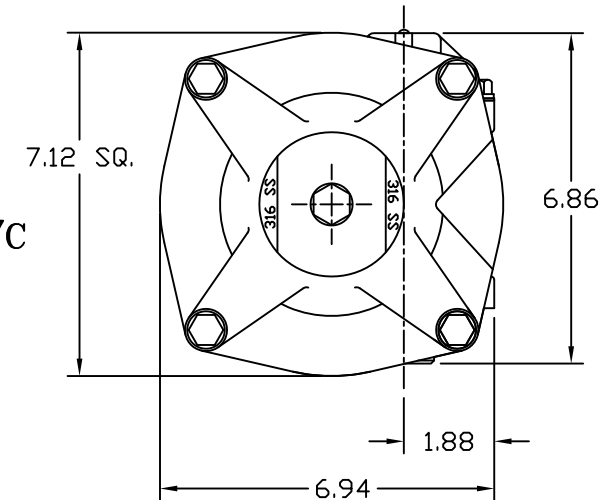


### SECTION A-A

YOKE SHOWN AT MID-STROKE  
POINTER OMITTED FOR CLARITY

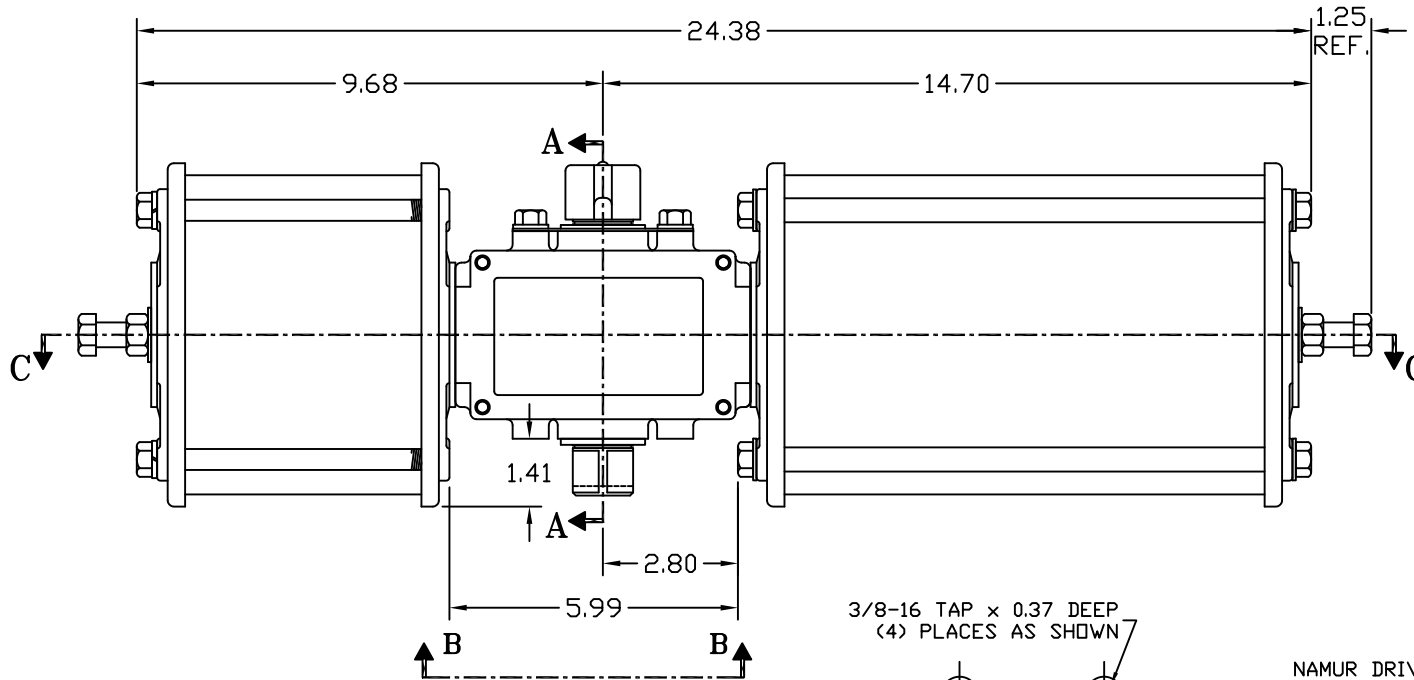


#### NOTE(S):

1. DUE TO SIZE LIMITATIONS, THIS MODEL REQUIRES THE OPTIONAL NAMUR BRACKET FOR MOUNTING NAMUR ACCESSORIES.

3/8-16 TAP x 0.37 DEEP  
(4) PLACES AS SHOWN

0.998 SQUARE  
0.995

0.251<sup>+0.010</sup>/<sub>-0.000</sub> C'BORE x 0.209<sup>+0.010</sup>/<sub>-0.000</sub> DEEP  
M6 TAP x 1/2" DEEP



### VIEW B-B

MODEL 15 SS MOUNTING PATTERN BOTH SIDES  
(SCALE: N.T.S.)

E	UPDATED SECTION A-A	CAW		10/12/06
D	CORRECTED VIEW B-B	CAW		06/22/06
C	REVISED CYLINDER TO CANTED	JLC		
B	NEW EXTENDED FORK YOKE DESIGN	BDC		
REV	CHANGE	BY	CHK	APR DATE

<b>MORIN</b> Birmingham, AL					
TITLE: MODEL S-100U-S000 ACTUATOR					
DRAWN BY:	DATE:	CHECKER:	DATE:	APPROVAL:	DATE:
BDC	9/21/00				
SCALE:	FULL	REVISION:	E	DRAWING NO.:	
SHEET	1 OF 1	DWG. SIZE:	E		
					S15S006E