



NAMUR POINTER ADAPTER
(SEE DWG. S01-02-01 FOR DETAILS)

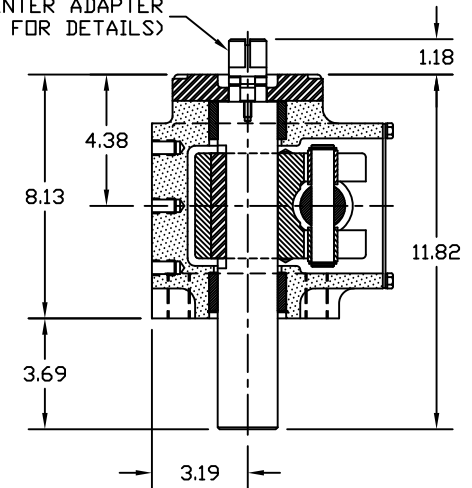


SECTION A-A
YOKE SHOWN AT MID-STROKE
POINTER OMITTED FOR CLARITY

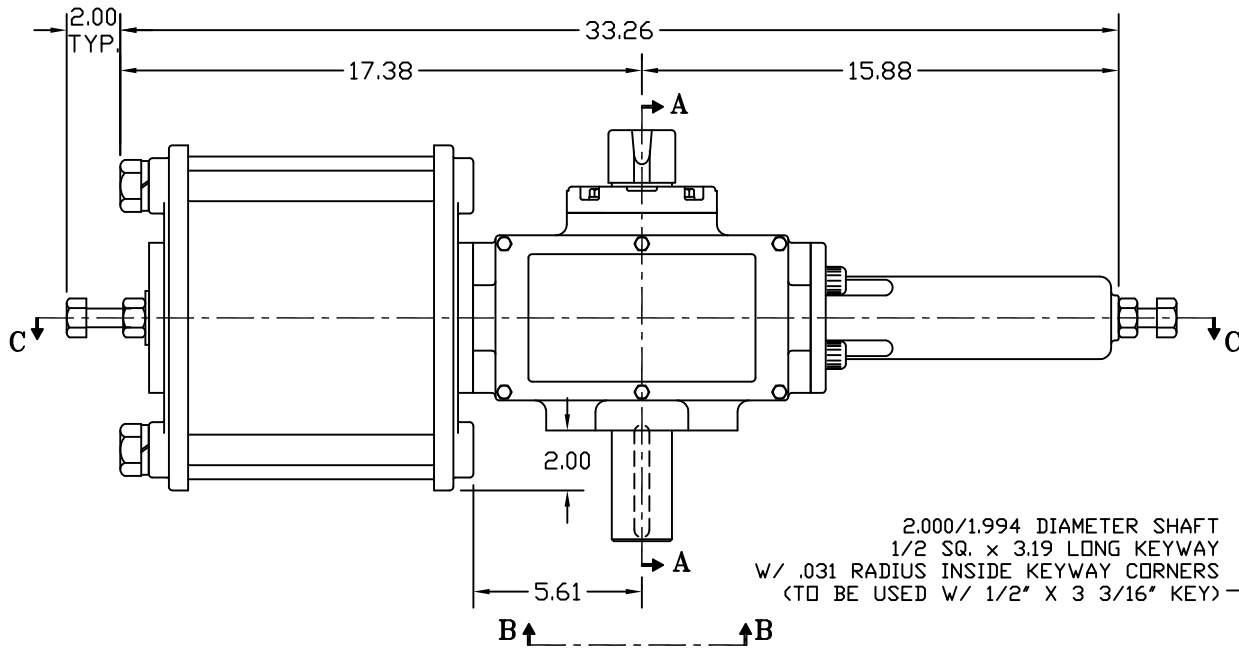


2.000/1.994 DIAMETER SHAFT
1/2 SQ. x 3.19 LONG KEYWAY
W/ .031 RADIUS INSIDE KEYWAY CORNERS
(TO BE USED W/ 1/2" x 3 3/16" KEY)

3/4-10 UNC TAP x 1.18 DEEP
(4) PLACES AS SHOWN ON
6.50 DIAMETER BOLT CIRCLE

NAMEPLATE SIDE



ISO (F16) MOUNTING PATTERN

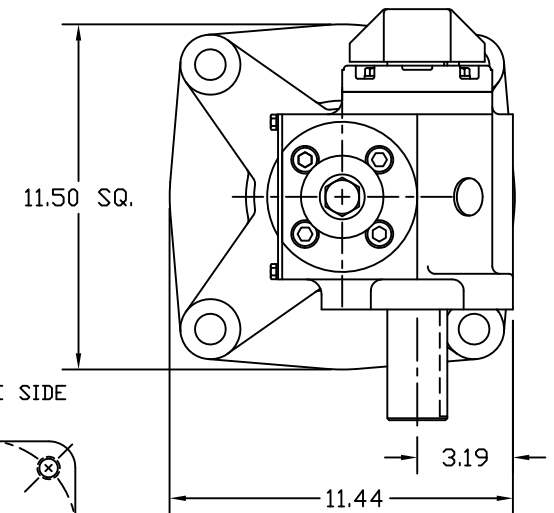

MORIN® Birmingham, AL		TITLE: MODEL S-210U-D000 ACTUATOR			
DRAWN BY: BDC	DATE: 1/17/00	CHECKER:	DATE:	APPROVAL:	DATE:
SCALE: HALF	REVISION: E	DRAWING NO.: S25S502E			
SHEET 1 of 1	DWG. SIZE: D				

E	UPDATED VIEW B-B & SECTION A-A	CAW			02/16/07
D	UPDATED VIEW B-B	CAW			07/20/06
C	UPDATED CYLINDER LENGTH TO CANTED	CAW			06/21/06
B	REVISED DETAIL SECTION A-A	BDC			
REV	CHANGE	BY	CHK	APR	DATE