



NAMUR POINTER ADAPTER  
(SEE DWG. S01-02-01 FOR DETAILS)

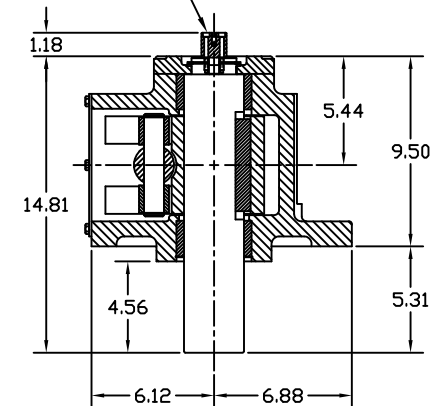


### SECTION A-A

YOKE SHOWN AT MID-STROKE  
POINTER OMITTED FOR CLARITY

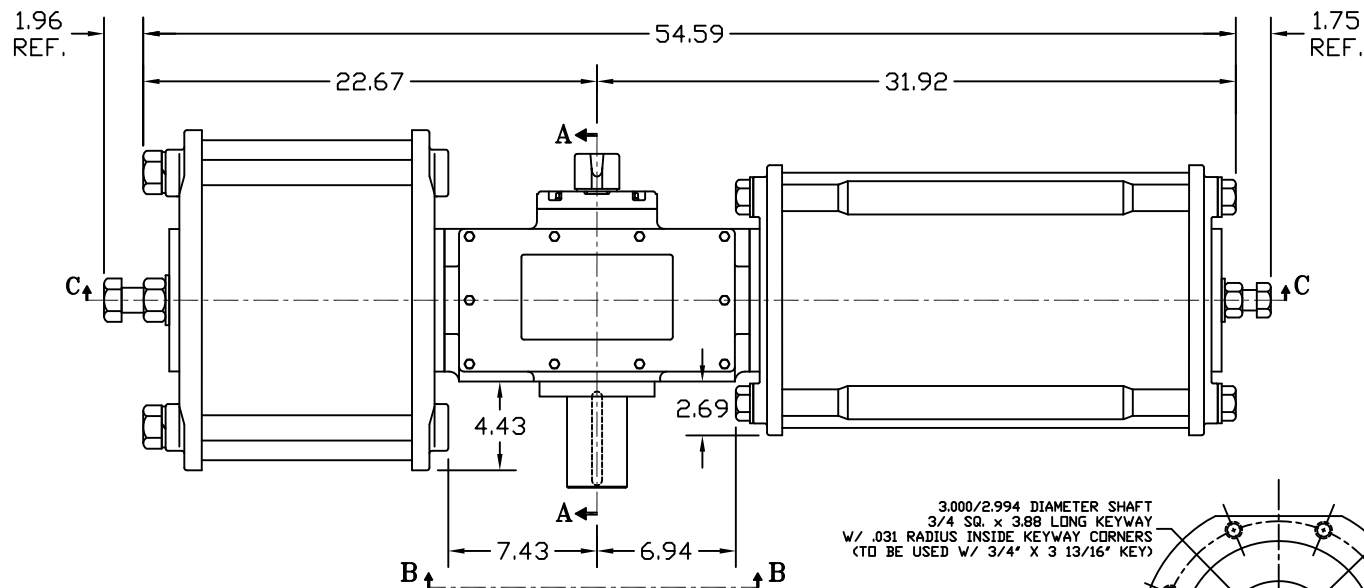


3.000/2.994 DIAMETER SHAFT  
3/4 SQ. x 3.88 LONG KEYWAY  
W/ .031 RADIUS INSIDE KEYWAY CORNERS  
(TO BE USED W/ 3/4" x 3 13/16" KEY)

3/4-10 UNC TAP x 1.18 DEEP  
(8) PLACES AS SHOWN ON  
11.73 DIAMETER BOLT CIRCLE

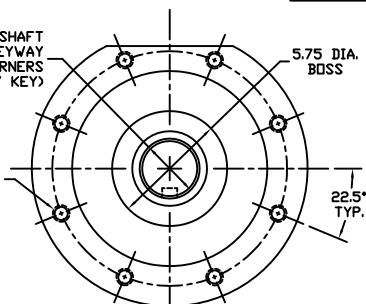

ISO F30 MOUNTING PATTERN

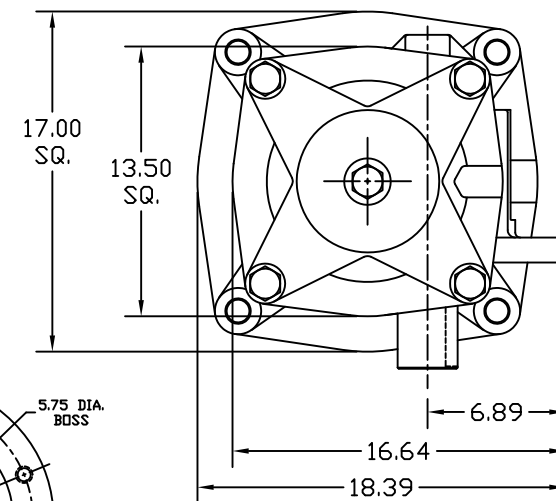

**MORIN**  
Birmingham, AL

TITLE: MODEL S-944U-S000 ACTUATOR

DRAWN BY: DATE: CHECKER: DATE: APPROVAL: DATE:

BDC 9/18/02

SCALE: 3X REVISION: E DRAWING NO.:

SHEET DWG. SIZE: S30S005E

1 of 1 D

E	UPDATED VIEW B-B	CAW		05/06/13
D	UPDATED SECTION A-A & VIEW B-B	CAW		02/27/07
C	UPDATED SECTION A-A & VIEW B-B	CAW		07/25/06
B	UPDATED CYLINDER LENGTH TO CANTED	CAW		06/27/06
REV	CHANGE	BY	CHK	APR
				DATE