



SECTION A-A

YOKE SHOWN AT MID-STROKE
POINTER OMITTED FOR CLARITY

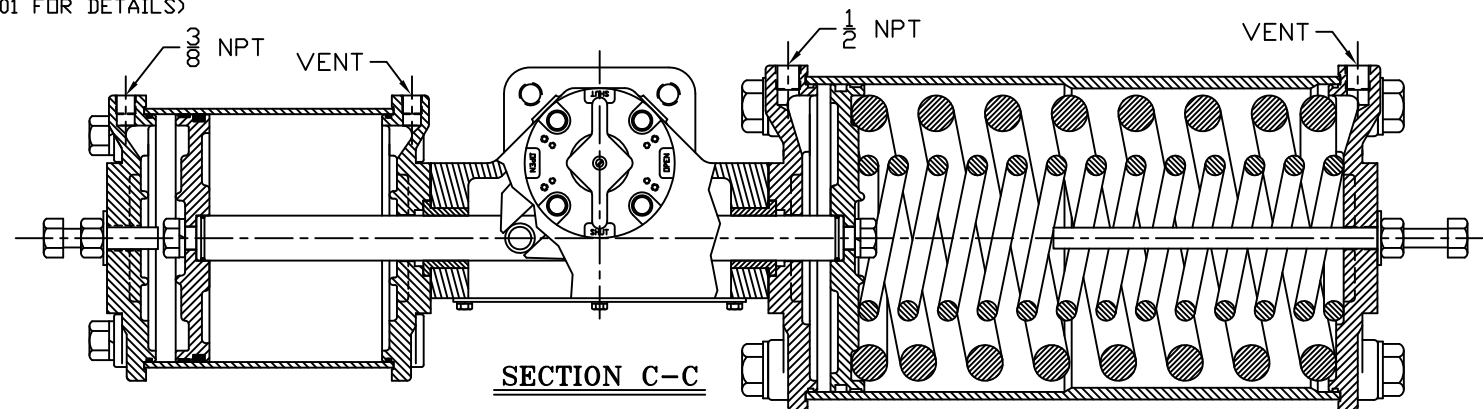


SECTION C-C

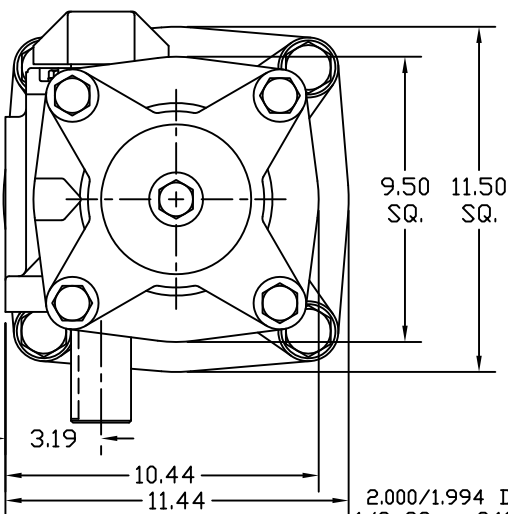

2.000/1.994 DIAMETER SHAFT
1/2 SQ. x 3.19 LONG KEYWAY
W/ .031 RADIUS INSIDE KEYWAY CORNERS
(TO BE USED W/ 1/2" x 3 3/16" KEY)

3/4-10 UNC TAP x 1.18 DEEP
(4) PLACES AS SHOWN ON
6.50 DIAMETER BOLT CIRCLE

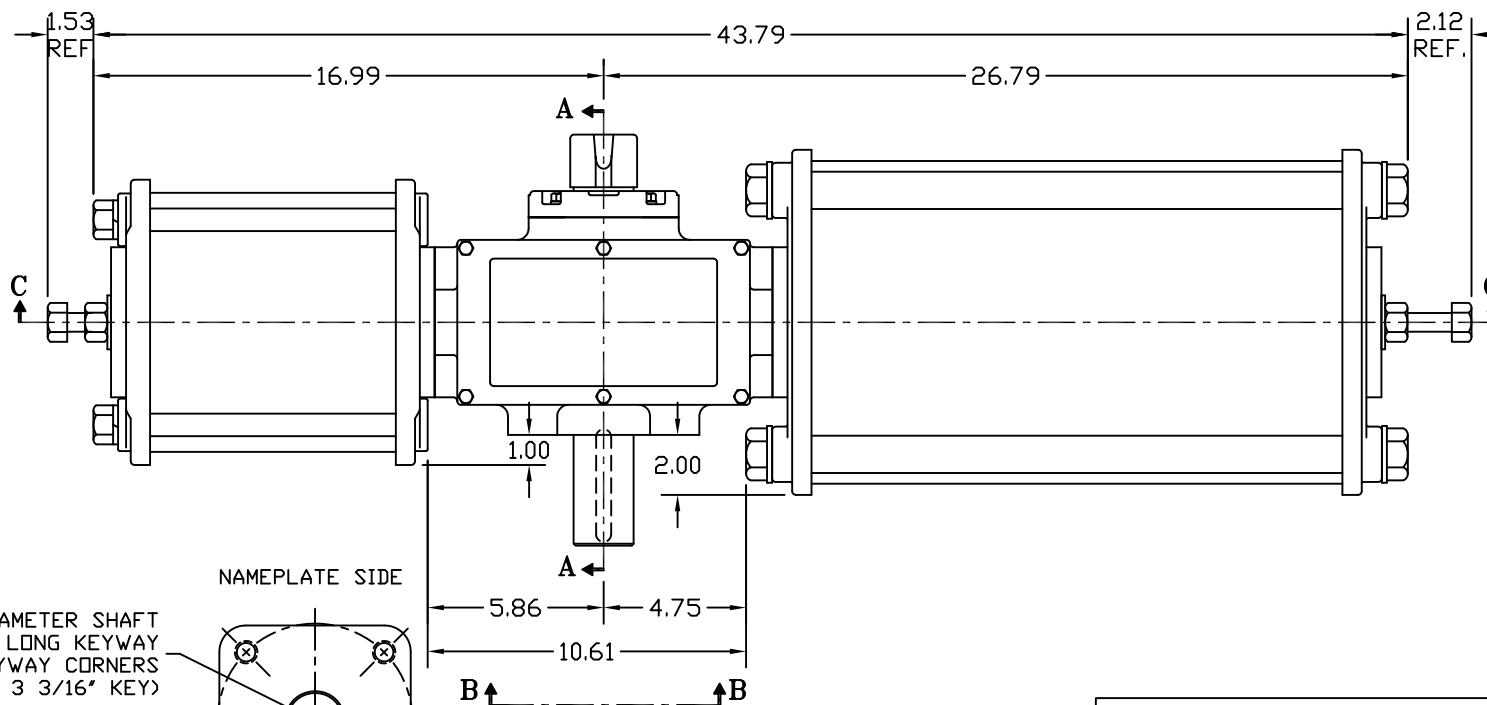

NAMEPLATE SIDE

VIEW B-B

ISO (F16) MOUNTING PATTERN

MORIN® Birmingham, AL					
TITLE: MODEL S-345U-S000 ACTUATOR					
DRAWN BY:	DATE:	CHECKER:	DATE:	APPROVAL:	DATE:
BDC	9/12/02				
SCALE:	HALF	REVISION:	D	DRAWING NO.:	
SHEET	1 OF 1	DWG. SIZE:	D	S25S006D	

REV	CHANGE	BY	CHK	APR	DATE
D	UPDATED SECTION A-A & VIEW B-B	CAW			02/15/07
C	UPDATED SECTION A-A & VIEW B-B	CAW			07/20/06
B	UPDATED CYLINDER LENGTH TO CANTED	CAW			06/21/06