

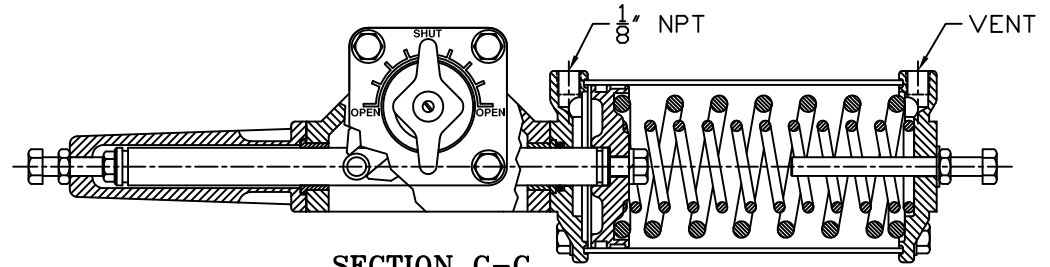


SECTION A-A

YOKE SHOWN AT MID-STROKE
POINTER OMITTED FOR CLARITY

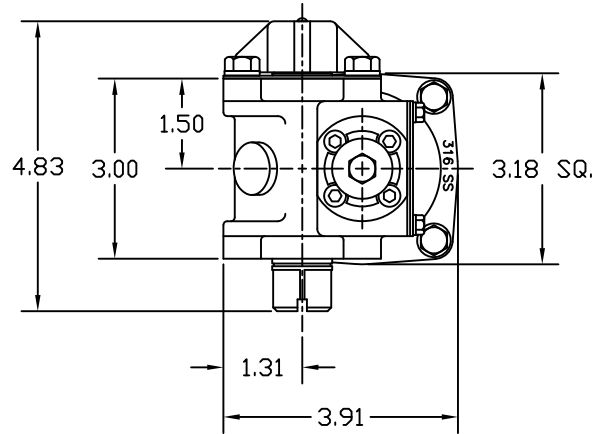

SECTION C-C

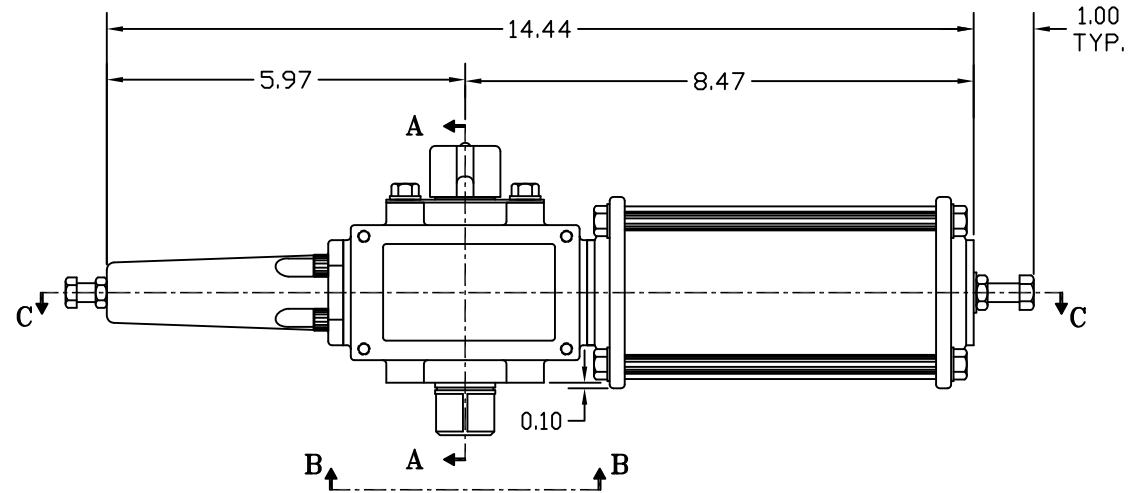

5/16-18 UNC TAP THRU
(8) PLACES AS SHOWN

.746 SQUARE
.743

.157
.160

2.000
SQUARE

0.251^{+0.010}_{-.000} C'BORE x 0.209^{+0.010}_{-.000} DEEP
M6 TAP x 1/2" DEEP

NAMUR DRIVE

.197
.205 SLOT

.87^{+0.01}_{-.00}

VIEW B-B

MODEL 10 SS MOUNTING PATTERN BOTH SIDES
(SCALE: N.T.S.)

NOTE(S):

1. DUE TO SIZE LIMITATIONS, THIS MODEL REQUIRES THE OPTIONAL NAMUR BRACKET FOR MOUNTING NAMUR ACCESSORIES.

| MORIN BIRMINGHAM, AL. | | | | | |
|----------------------------|-----------------|------------------------|------|-------------|------|
| MODEL S-006U-S000 ACTUATOR | | | | | |
| DRAWN BY (AB) | DATE 8/30/00 | CHECKED BY | DATE | APPROVED BY | DATE |
| SCALE FULL | REVISION | DRAWING NO. S10S001 | | | |
| SHEET 1 OF 1 | DWG. SIZE D | | | | |

| REV | CHANGE | BY | CHK | APR | DATE |
|-----|--------|----|-----|-----|------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |