

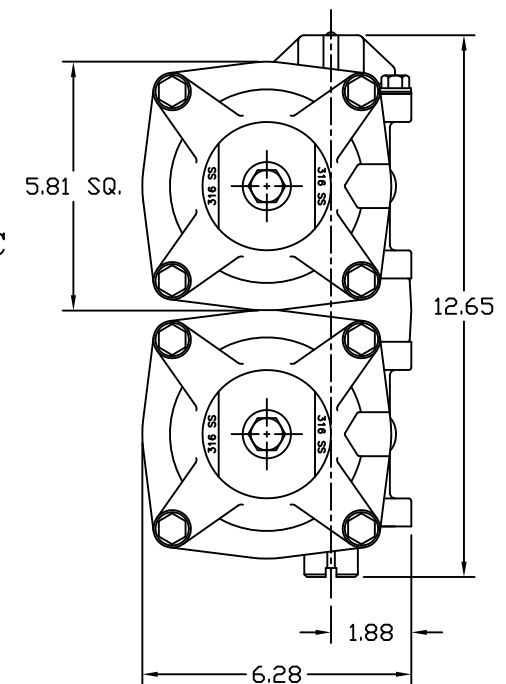
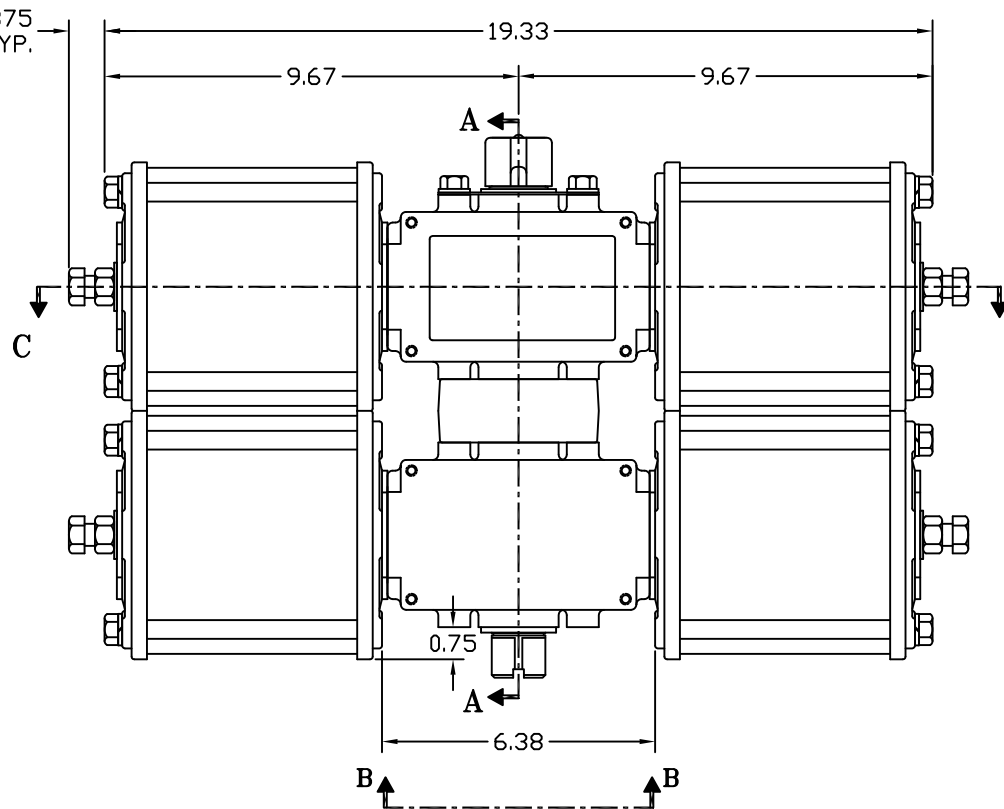


SECTION A-A

YOKE SHOWN AT MID-STROKE
POINTER OMITTED FOR CLARITY



3/8-16 TAP x 0.37 DEEP
(4) PLACES AS SHOWN

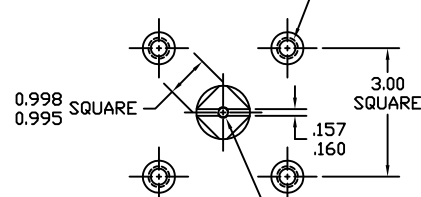

VIEW B-B

MODEL 15 SS MOUNTING PATTERN BOTH SIDES
(SCALE: N.T.S.)

NOTE(S):

1. DUE TO SIZE LIMITATIONS, THIS MODEL REQUIRES THE OPTIONAL NAMUR BRACKET FOR MOUNTING NAMUR ACCESSORIES.

REV	DESCRIPTION	BY	CHK	APR	DATE
C	UPDATED CYLINDER LENGTH TO CANTED	CAW			06/14/06
B	NEW EXTENDED FORK YOKE DESIGN	BDC			
	CHANGE	BY	CHK	APR	DATE

MORIN Birmingham, AL					
TITLE: MODEL S-144U-D000 ACTUATOR					
DRAWN BY:	DATE:	CHECKER:	DATE:	APPROVAL:	DATE:
BDC	10/19/00				
SCALE:	REVISION:	DRAWING NO.:			
1:1.125	C	S15S507C			
SHEET	DWG. SIZE:				
1 OF 1	E				