



NAMUR POINTER ADAPTER
(SEE DWG. S01-02-01 FOR DETAILS)

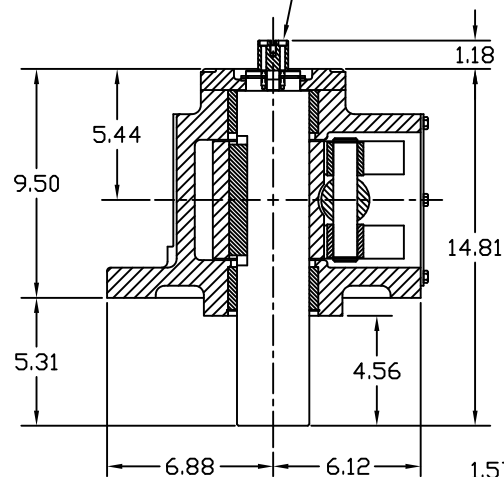


SECTION A-A

YOKE SHOWN AT MID-STROKE
POINTER OMITTED FOR CLARITY

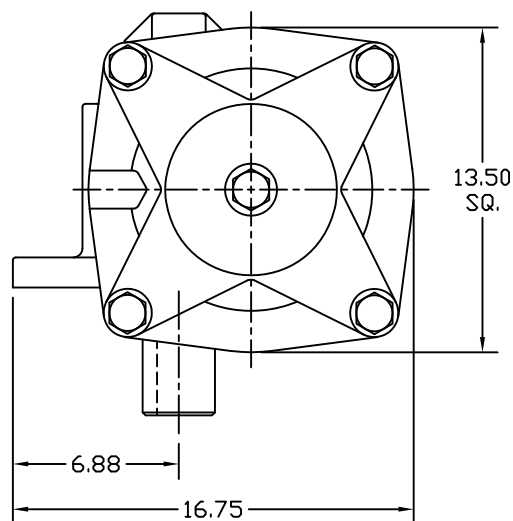


3.000/2.994 DIAMETER SHAFT
3/4 SQ. x 3.88 LONG KEYWAY
W/ .031 RADIUS INSIDE KEYWAY CORNERS
(TO BE USED W/ 3/4" X 3 13/16" KEY)

3/4-10 UNC TAP x 1.18 DEEP
(8) PLACES AS SHOWN ON
11.73 DIAMETER BOLT CIRCLE

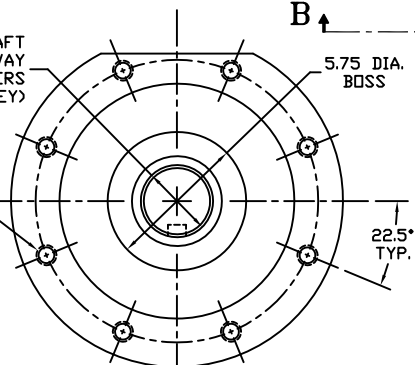


View b-b

ISO F30 MOUNTING PATTERN

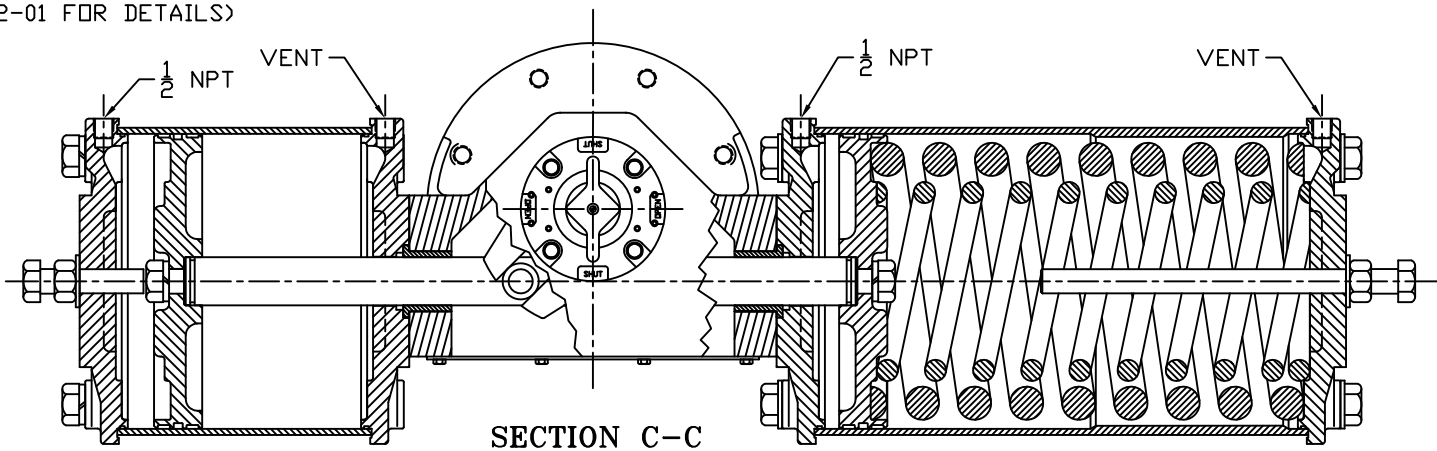

SECTION C-C

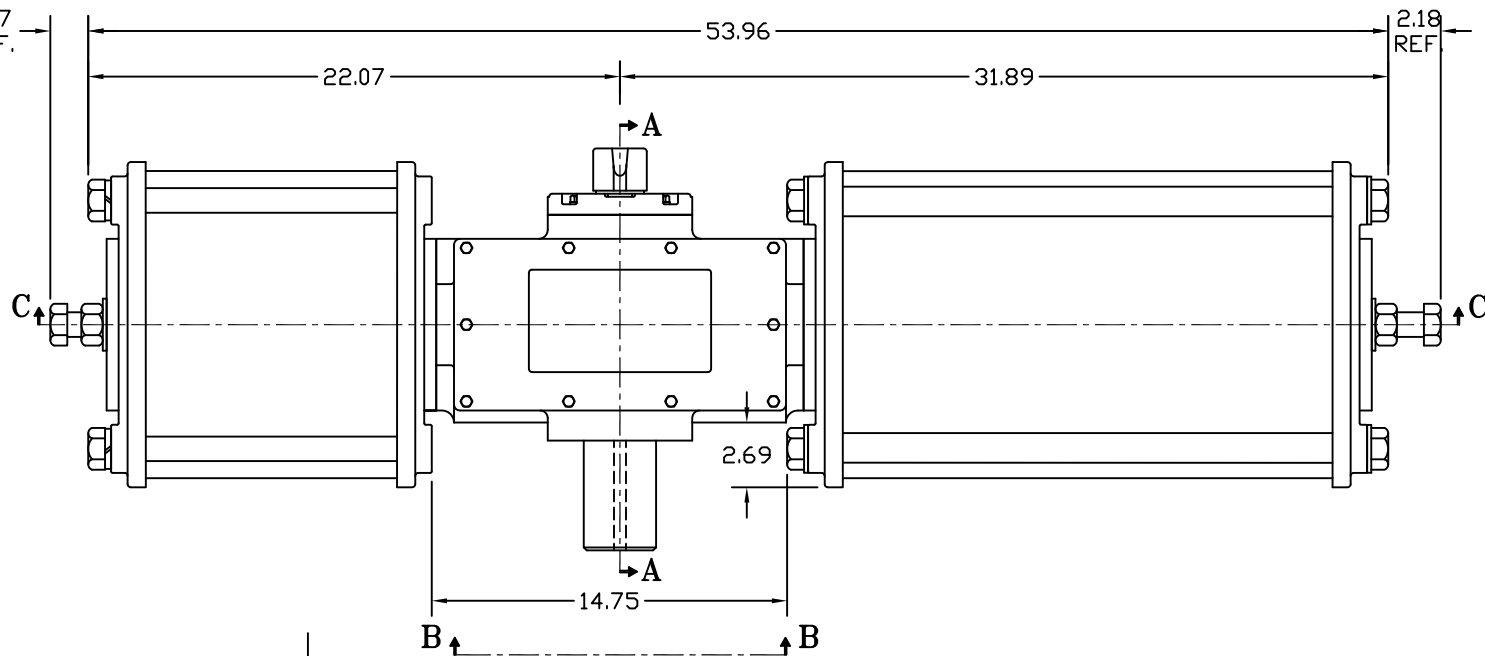

REV	CHANGE	BY	CHK	APR	DATE
E	UPDATED VIEW B-B	CAW			05/06/13
D	UPDATED VIEW B-B & SECTION A-A	CAW			02/21/07
C	UPDATED VIEW B-B & SECTION A-A	CAW			07/21/06
B	UPDATED CYLINDER LENGTH TO CANTED	CAW			06/27/06

MORIN BIRMINGHAM, AL					
MODEL S-740U-S000 ACTUATOR					
DRAWN BY BDC	DATE 1/17/01	CHECKED BY	DATE	APPROVED BY	DATE
SCALE HALF	REVISION E	DRAWING NO. S30S003E			
SHEET 1 OF 1	DWG. SIZE E				