
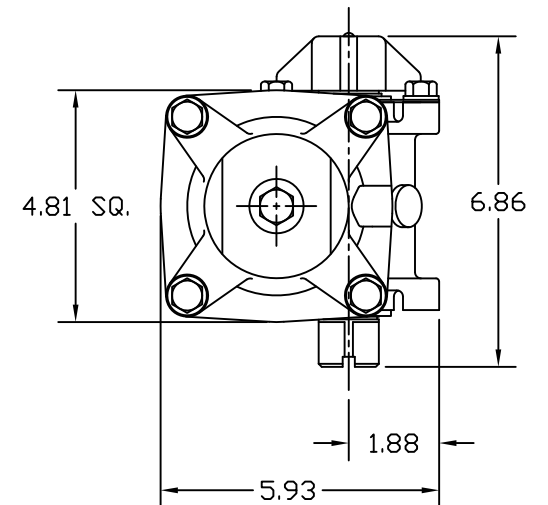


SECTION A-A


YOKE SHOWN AT MID-STROKE
POINTER OMITTED FOR CLARITY

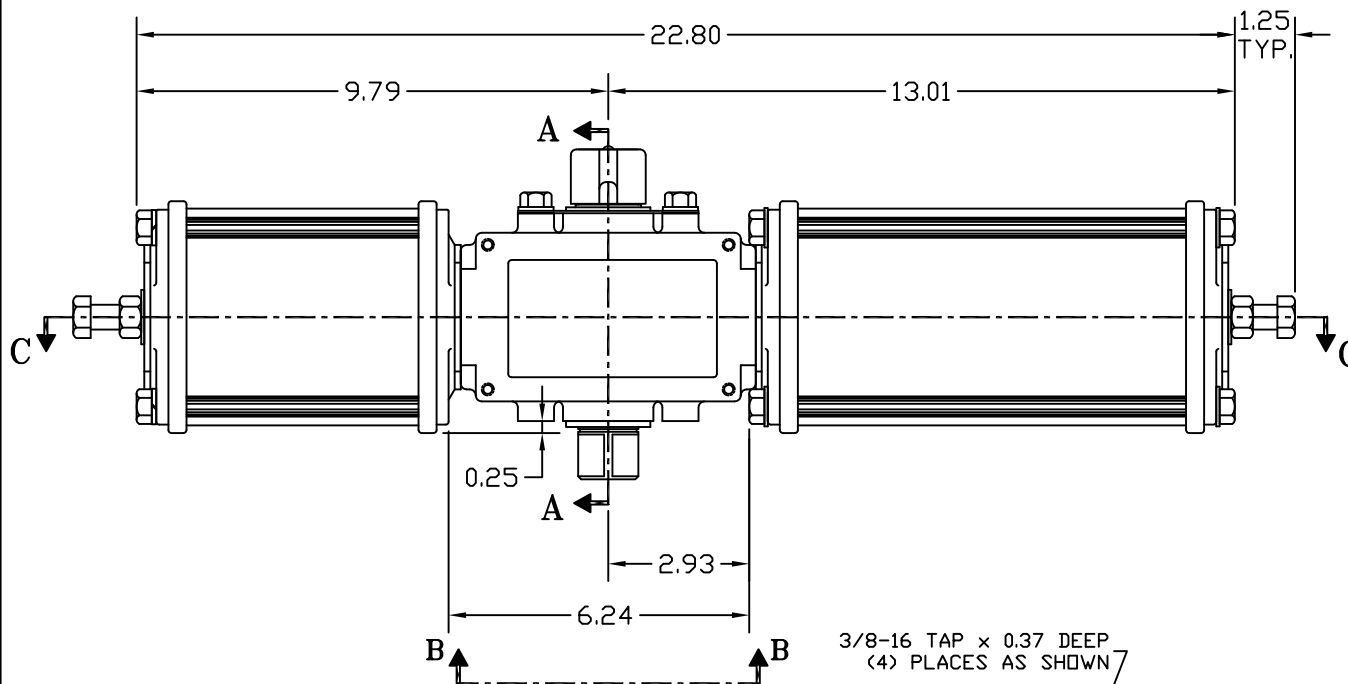

NOTE(S):

1. DUE TO SIZE LIMITATIONS, THIS MODEL REQUIRES THE OPTIONAL NAMUR BRACKET FOR MOUNTING NAMUR ACCESSORIES.


3/8-16 TAP x 0.37 DEEP
(4) PLACES AS SHOWN

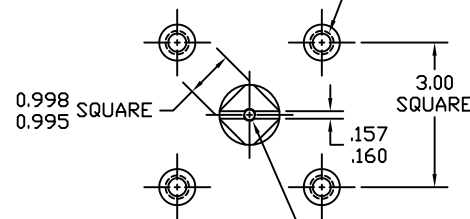

0.251^{+0.010}/_{-0.000} C'BORE x 0.209^{+0.010}/_{-0.000} DEEP
M6 TAP x 1/2" DEEP

VIEW B-B

MODEL 15 SS MOUNTING PATTERN BOTH SIDES
(SCALE: N.T.S.)



E	UPDATED SECTION A-A	CAW		10/12/00
D	CORRECTED VIEW B-B	CAW		06/22/00
C	REVISED CYLINDER LENGTH TO CANTED	JLC		
B	NEW EXTENDED FORK YOKE DESIGN	BDC		
REV	CHANGE	BY	CHK	APR DATE

MORIN Birmingham, AL					
TITLE: MODEL S-046U-S000 ACTUATOR					
DRAWN BY:	DATE:	CHECKER:	DATE:	APPROVAL:	DATE:
BDC	10/19/00				
SCALE:	REVISION:	E	DRAWING NO.:		
FULL			S15S003E		
SHEET	DWG. SIZE:	E			
1 OF 1					