

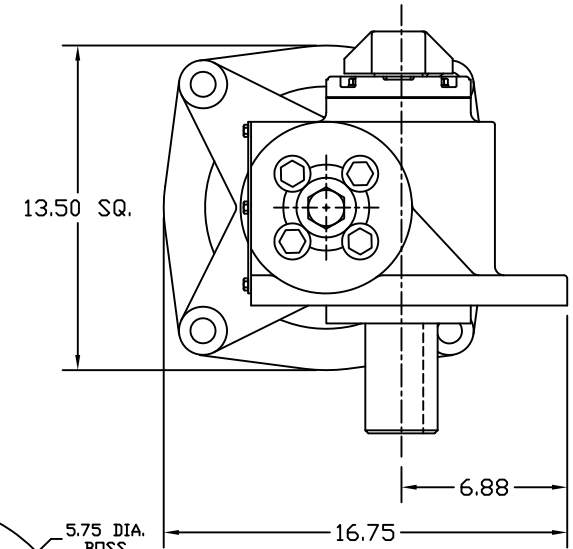


**SECTION A-A**  
YOKE SHOWN AT MID-STROKE  
POINTER OMITTED FOR CLARITY

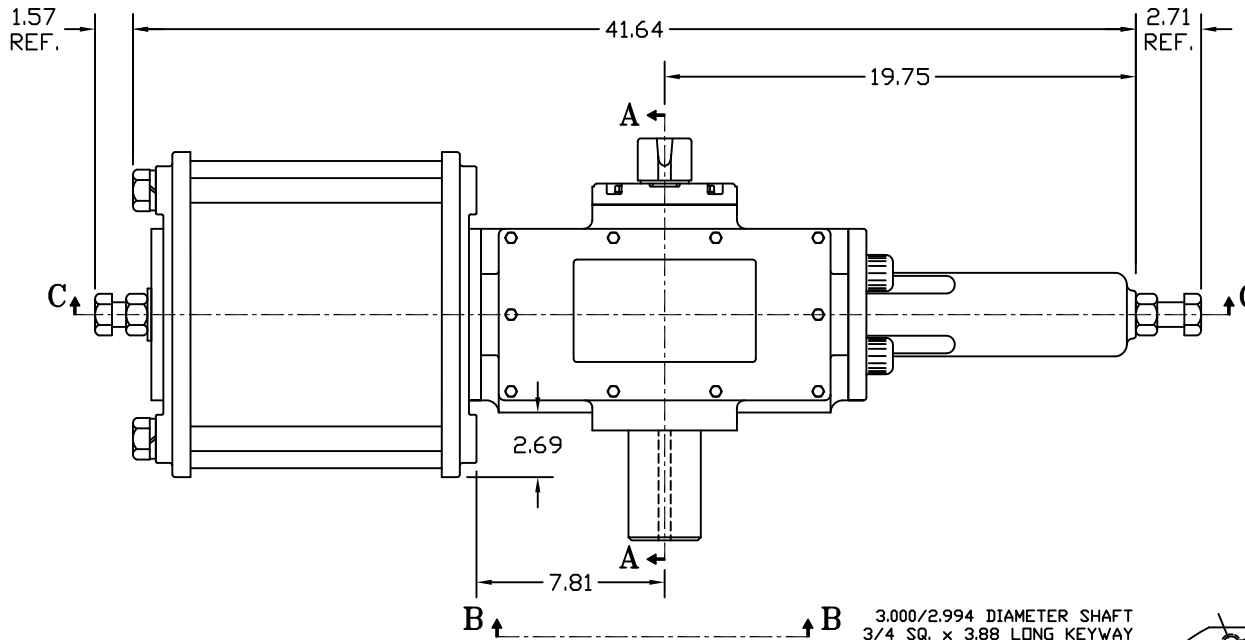

3.000/2.994 DIAMETER SHAFT  
3/4 SQ. x 3.88 LONG KEYWAY  
W/ .031 RADIUS INSIDE KEYWAY CORNERS  
(TO BE USED W/ 3/4" x 3 13/16" KEY)

3/4-10 UNC TAP x 1.18 DEEP  
(8) PLACES AS SHOWN ON  
11.73 DIAMETER BOLT CIRCLE

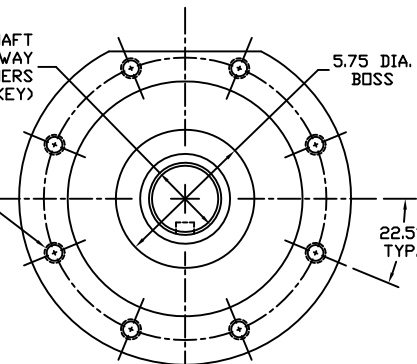

**VIEW B-B**  
ISO F30 MOUNTING PATTERN

MORIN BIRMINGHAM, AL					
MODEL S-370U-D000 ACTUATOR					
DRAWN BY	DATE	CHECKED BY	DATE	APPROVED BY	DATE
BDC	1/17/01				
SCALE	HALF	REVISION	E	DRAWING NO.	
SHEET	1 OF 1	DWG. SIZE	E		
				S30S501E	

REV	CHANGE	BY	CHK	APR	DATE
E	UPDATED VIEW B-B	CAW			05/06/13
D	UPDATED SECTION A-A & VIEW B-B	CAW			02/27/07
C	UPDATED SECTION A-A & VIEW B-B	CAW			07/26/06
B	UPDATED CYLINDER LENGTH TO CANTED	CAW			06/27/06