

Flexim FLUXUS H736 Ultrasonic Flowmeter



Ultrasonic Process Monitoring and Flow Measurement of Hydrocarbons

Features



- 4 measuring channels to compensate highly disturbed flow profiles and to facilitate more accurate and repeatable measurements
- Best suitable for applications with limited straight runs
- High precision at fast and slow flow rates, high temperature and zero point stability

Applications

- Flow and density measurement in leak detection systems
- Allocation flow and density measurement in hydrocarbon transport systems
- Redundant check metering to custody transfer flow measurements

Transmitter

Technical data

		FLUXUS H736**-NNN	FLUXUS H736**-A2N	FLUXUS H736**-F2N
				
design		field device with 4 measuring channels in stainless steel housing		
measurement				
• HPI				
standard volumetric flow rate				
• measurement uncertainty	%	±1 (crude oil, refined products, liquefied gases, heavy oils)		
• standard volumetric flow rate correction		VCF = CTL · CPL = ρ/ρ _N VCF - volume correction factor CTL - correction for the effect of temperature on liquid CPL - correction for the effect of pressure on liquid ρ - operating density ρ _N - normalised density		
operating density, normalised density				
• repeatability	%	±1 (with field calibration of sound speed)		
• flow				
measurement principle		transit time difference correlation principle, automatic NoiseTrek selection for measurements with high gaseous or solid content		
flow direction		bidirectional		
synchronised channel averaging		x		
flow velocity	m/s	measuring range: 0.01...25		
repeatability		0.15 % MV ±0.005 m/s		
fluid		all acoustically conductive liquids with < 10 % gaseous or solid content in volume (transit time difference principle)		
temperature compensation		corresponding to the recommendations in ANSI/ASME MFC-5.1-2011		
measurement uncertainty (volumetric flow rate)				
measurement uncertainty of the measuring system ¹		±0.3 % MV ±0.005 m/s		
measurement uncertainty at the measuring point ²		±1 % MV ±0.005 m/s		
transmitter				
power supply		• 90...264 V/50...60 Hz or • 11...32 V DC		
power consumption	W	< 15		
number of measuring channels		4 (1 measuring point)		
damping	s	0...100 (adjustable)		
measuring cycle	Hz	100...1000		
response time	s	1		
housing material		stainless steel 316L (1.4404)		
degree of protection		IP66		
dimensions	mm	see dimensional drawing		
weight	kg	7.2		
fixation		wall mounting, optional: 2" pipe mounting		
ambient temperature	°C	-40...+60 (< -20 without operation of the display)		
display		240 x 128 pixels, backlight		
menu language		English, German, French, Spanish, Dutch, Russian, Polish, Turkish, Italian, Chinese		
explosion protection				
• ATEX/IECEx				
marking		-	CE 0637 UK Ex II3G Ex ec IIC T4 Gc II2D Ex tb IIIC T120 °C Db T _a -40...+60 °C	-
certification		-	FM24ATEX0022 X FM24ATEX0024 X IECEx FMG 24.0024X	-
• FM				
marking		-	-	 Cl. I, II, III / Div. 2 / GP. A, B, C, D, F, G / T5 -40 °C ≤ T _a ≤ +60 °C
certification		-	-	FM23US0080, FM23CA0059

¹ with aperture calibration of the transducers² for transit time difference principle and reference conditions³ outside the explosive atmosphere (housing cover open)

		FLUXUS H736**-NNN	FLUXUS H736**-A2N	FLUXUS H736**-F2N
measuring functions				
physical quantities		<ul style="list-style-type: none">operating volumetric flow rate, standard volumetric flow rate according to ASTM 1250/TP25/4311, flow velocity, mass flow rate additional output quantities <ul style="list-style-type: none">HPI: API gravity, density, normalised densityinterface detection: slope of the HPI physical quantitiesfluid detection: according to fluid table		
totaliser		volume, mass		
diagnostic functions		sound speed, signal amplitude, SNR, SCNR, standard deviation of amplitudes and transit times		
communication interfaces				
service interfaces		measured value transmission, parametrisation of the transmitter: <ul style="list-style-type: none">USB³LAN³		
process interfaces		max. 1 option: <ul style="list-style-type: none">Modbus RTUHARTProfibus PAFF H1Modbus TCP	max. 1 option: <ul style="list-style-type: none">Modbus RTUHARTProfibus PAFF H1	max. 1 option: <ul style="list-style-type: none">Modbus RTUHARTProfibus PAFF H1Modbus TCP
accessories				
data transmission kit		USB cable		
software		<ul style="list-style-type: none">FluxDiagReader: reading of measured values and parameters, graphical representationFluxDiag (optional): reading of measurement data, graphical representation, report generation, parametrisation of the transmitter		
data logger				
loggable values		all physical quantities, totalised physical quantities and diagnostic values		
capacity		max. 800 000 measured values		
outputs				
		The outputs are galvanically isolated from the transmitter.		
number		active current inputs and outputs: max. 4		
• switchable current output				
		configurable according to NAMUR NE 43 All switchable current outputs are jointly switched to active or passive.		
number		max. 4		
range	mA	4...20 (alarm current: 3.2...3.99, 20.01...24, hardware fault current: 3.2)		
uncertainty		0.04 % of output value ±3 µA		
active output		R _{ext} = 250...530 Ω, U _{opencircuit} = 28 V DC		
passive output		U _{ext} = 9...30 V DC, depending on R _{ext} (R _{ext} < 458 Ω at 20 V)		
current output in HART mode		option		
• range	mA	4...20 (alarm current: 3.5...3.99, 20.01...22, hardware fault current: 3.2)		
• active output		R _{ext} = 250...530 Ω, U _{opencircuit} = 28 V DC		
• passive output		U _{ext} = 9...30 V DC, depending on R _{ext} (R _{ext} = 250...458 Ω at 20 V)		
• digital output				
number		max. 4		
functions		<ul style="list-style-type: none">frequency outputbinary outputpulse output		
type		open collector (passive)		
operating parameters		OC30V (IEC 60947-5-6) 5...30 V, I _{max} = 20 mA, R _{int} = 1020 Ω Low: U < 2 V at I _{loop} = 2 mA (R _{ext} = 11 kΩ at U _{ext} = 24 V) High: U > 15 V (R _{ext} = 11 kΩ at U _{ext} = 24 V) or OC30V/100mA 5...30 V, I _{max} = 100 mA, R _{int} = 20 Ω Low: U < 2 V at I _{loop} = 2 mA (R _{ext} = 12 kΩ at U _{ext} = 24 V) High: U > 15 V (R _{ext} = 12 kΩ at U _{ext} = 24 V)		OC30V (IEC 60947-5-6) 5...30 V, I _{max} = 20 mA, R _{int} = 1020 Ω Low: U < 2 V at I _{loop} = 2 mA (R _{ext} = 11 kΩ at U _{ext} = 24 V) High: U > 15 V (R _{ext} = 11 kΩ at U _{ext} = 24 V)
frequency output				
• range	kHz	0.002...10		
• damping	s	0...999.9 (adjustable)		
• pulse-to-pause ratio		1:1		
binary output				
• binary output as alarm output		limit, change of flow direction or error		
pulse output				
• pulse value	units	0.01...1000		
• pulse width	ms	0.05...1000		
• pulse rate		max. 10 000 pulses		

¹ with aperture calibration of the transducers² for transit time difference principle and reference conditions³ outside the explosive atmosphere (housing cover open)

		FLUXUS H736**-NNN	FLUXUS H736**-A2N	FLUXUS H736**-F2N
inputs				
		The inputs are galvanically isolated from the transmitter.		
number		active current inputs and outputs: max. 4		
• temperature input				
number		max. 4		
type		Pt100/Pt1000		
connection		4-wire		
range	°C	-150...+560		
resolution	K	0.01		
accuracy		±0.01 % MV ±0.03 K at 18...28 °C ±0.01 % MV ±0.03 K ±0.0005 %/K at <18 °C/>28 °C		
cable resistance	Ω	max. 1000		
• switchable current input				
		All switchable current inputs are jointly switched to active or passive.		
number		max. 4		
accuracy		±0.1 % MV ±0.01 mA at 18...28 °C ±0.1 % MV ±0.01 mA ±0.005 %/K at <18 °C/>28 °C		
resolution	μA	0.1		
active input		R _{int} = 75 Ω, I _{max} ≤ 30 mA U _{opencircuit} = 28 V (open circuit) U _{min} = 21.4 V at 20 mA		
• range	mA	0...20		
passive input		U _{ext} = 24 V, R _{int} = 35 Ω, I _{max} ≤ 24 mA		
• range	mA	0...20		

¹ with aperture calibration of the transducers

² for transit time difference principle and reference conditions

³ outside the explosive atmosphere (housing cover open)

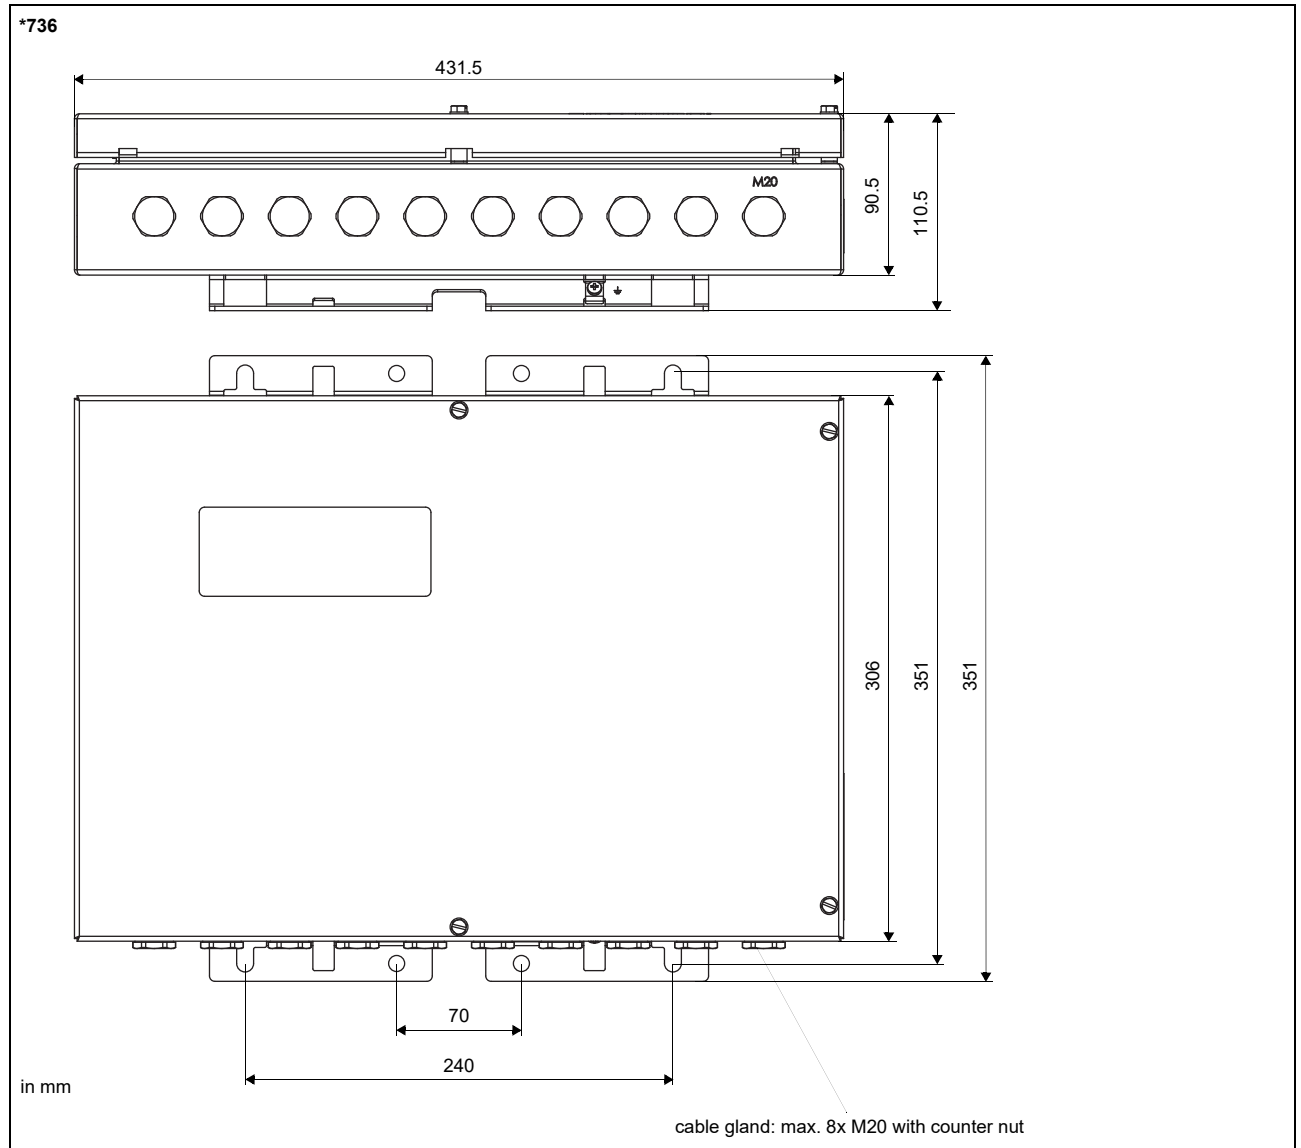
Fluid data sets

The transmitter contains fluid data sets for the HPI measuring mode.


fluid data set	main group	ρ _N [kg/m ³]	API gravity	T [°C]	p [bar]	CTL	CPL
universal	crudes, refin. prod.	610...1000	10...100	0...100	0...100	ρ/ρ _N	MPMS 11.2.1
light ends	LPG, NGL	427...780	50...200	-50...60	0...100	ρ/ρ _N	MPMS 11.2.2
heavy ends	asphalts	875...1163	-10...+20	10...250	-	ρ/ρ _N	-

others on request

Dimensions




Wall and 2" pipe mounting kit

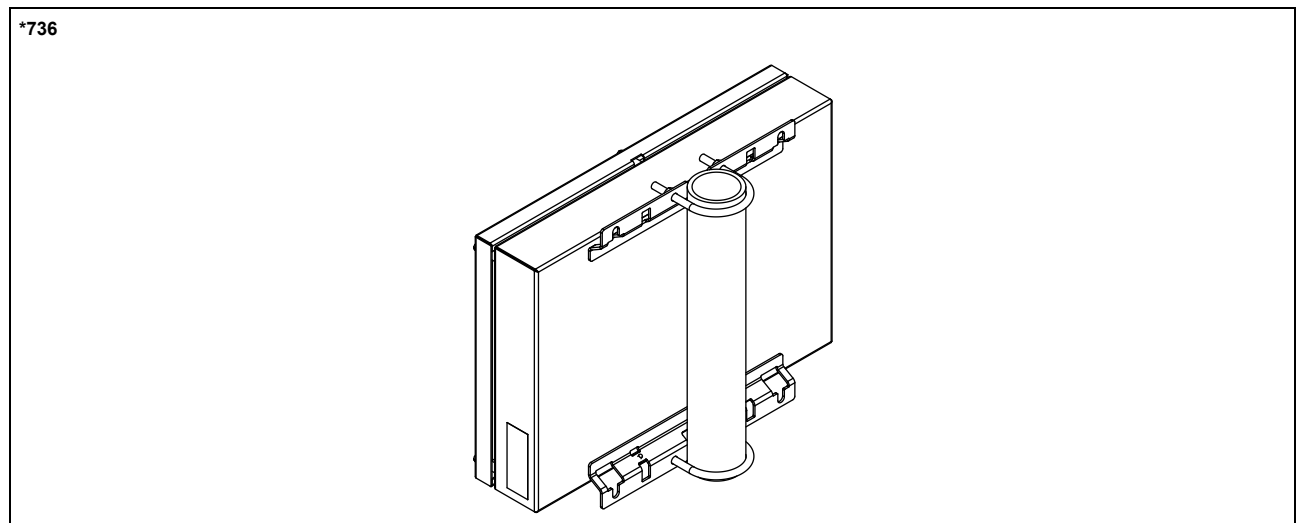

Storage

- do not store outdoors
- store within the original package
- store in a dry and dust-free place
- protect against sunlight
- keep all openings closed
- storing temperature: -40...+60 °C

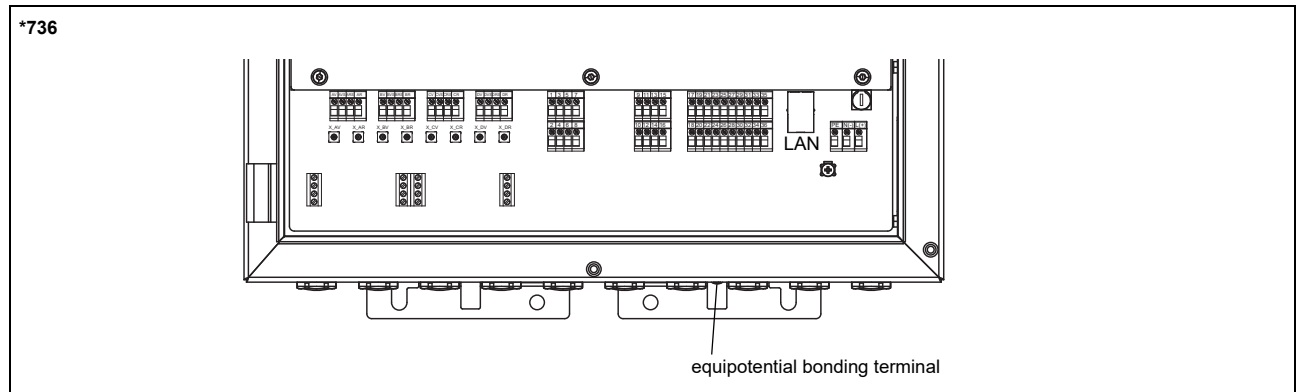Terminal assignment



power supply¹

AC		DC	
terminal	connection	terminal	connection
L	line conductor	(+)	+
N	neutral conductor	(-)	-
PE	protective conductor	PE	protective conductor

¹ cable (by customer): e.g. flexible wires, with insulated wire ferrules, wire cross-section: 0.25...2.5 mm²

transducers

transducer cable (transducers *****53, *****8*, ****LI*), extension cable		transducer cable (transducers *****52)		
measuring channel A, B, C, D		measuring channel A, B, C, D		
terminal	connection	transducer	terminal	connection
*V	signal	↑	X_*V	SMB connector
*VS	internal shield			
*RS	internal shield	⌋	X_*R	SMB connector
*R	signal			

outputs, inputs^{1, 2}

terminal	connection
depending on configuration	current output, digital output, current input
1, 2, 3, 4	temperature input
5, 6, 7, 8	
9, 10, 11, 12	
13, 14, 15, 16	
35+, 36-	passive current output/HART
35-, 36+	active current output/HART
35, 36	Modbus RTU, Profibus PA, FF H1

temperature probe

terminal	direct connection	connection with extension cable
1, 5, 9, 13	red	red
2, 6, 10, 14	white	white
3, 7, 11, 15	red/blue	grey
4, 8, 12, 16	white/blue	blue

USB	type C Hi-Speed USB 2.0 Device	service (FluxDiag/FluxDiagReader)
LAN	RJ45 10/100 Mbps Ethernet	<ul style="list-style-type: none"> service (FluxDiag/FluxDiagReader) Modbus TCP

¹ cable (by customer): e.g. flexible wires, with insulated wire ferrules, wire cross-section: 0.25...2.5 mm²

² The number, type and terminal assignment are customised.

Transducers

Overview







Shear wave transducers

	technical type					
	G	K	M	P	Q	S
zone 2 - FM Class I Div. 2 - nonEx SMB connector normal temperature range	CDG1N52 CLG1N52	CDK1N52 CLK1N52	CDM2N52 CLM2N52	CDP2N52 CLP2N52	CDQ2N52 CLQ2N52	CDS1N52
zone 2 - FM Class I Div. 2 - nonEx with stripped cable ends normal temperature range	CDG1N53 CLG1N53	CDK1N53 CLK1N53	CDM2N53 CLM2N53	CDP2N53 CLP2N53	CDQ2N53 CLQ2N53	CDS1N53
zone 2 - nonEx IP68	CDG1LI8	CDK1LI8	CDM2LI8	CDP2LI8		
zone 2 - FM Class I Div. 2 - nonEx SMB connector extended temperature range	CDG1E52 ¹ CLG1E52 ¹	CDK1E52 ¹ CLK1E52 ¹	CDM2E52 CLM2E52	CDP2E52 CLP2E52	CDQ2E52 CLQ2E52	
zone 2 - FM Class I Div. 2 - nonEx with stripped cable ends extended temperature range	CDG1E53 ¹ CLG1E53 ¹	CDK1E53 ¹ CLK1E53 ¹	CDM2E53 CLM2E53	CDP2E53 CLP2E53	CDQ2E53 CLQ2E53	
zone 1 normal temperature range	CDG1N81 CLG1N81	CDK1N81 CLK1N81	CDM2N81 CLM2N81	CDP2N81 CLP2N81	CDQ2N81 CLQ2N81	
zone 1 IP68	CDG1LI1	CDK1LI1	CDM2LI1	CDP2LI1		
zone 1 extended temperature range	CDG1E83 CLG1E83	CDK1E83 CLK1E83	CDM2E85 CLM2E85	CDP2E85 CLP2E85	CDQ2E85 CLQ2E85	
inner pipe diameter d						
min. extended	mm	400	100	50	25	10
min. recommended	mm	500	200	100	50	25
max. recommended	mm	4000	2000	1000	400	150
max. extended	mm	6500	2400	1200	480	240
pipe wall thickness						
min.	mm	11	5	2.5	1.2	0.6

¹ nonEx, FM

for further data see Technical specification TS_F7xx-transducersVx-xxx_Leu

Transducer mounting fixture

Variofix L		Variofix C	WaveInjector with chains
	 transducer frequency S		
		Variofix C with bolt mounting plates	WaveInjector with threaded rods
		 outer pipe diameter: VCM: max. 46 mm VCC: max. 36 mm	 outer pipe diameter: 35...380 mm









for further data see Technical specification TS_F7xx-transducersVx-xxx_Leu

Coupling materials for transducers

	normal temperature range (4th character of transducer order code = N)		extended temperature range higher temperatures (4th character of transducer order code = E, S)			WaveInjector	
	< 100 °C	< 130 °C	< 180 °C	< 200 °C	200...240 °C	< 280 °C	280...630 °C
< 24 h	coupling compound type N or coupling foil type VT	coupling compound type N or E or coupling foil type VT	coupling compound type E or coupling foil type VT	coupling compound type E or coupling foil type VT	coupling compound type H or coupling foil type TF	coupling foil type A and coupling foil type VT	coupling foil type B and coupling foil type VT
long time measurement	coupling foil type VT	coupling foil type VT	coupling foil type VT	coupling foil type VT	coupling foil type TF	coupling foil type A and coupling foil type VT	coupling foil type B and coupling foil type VT

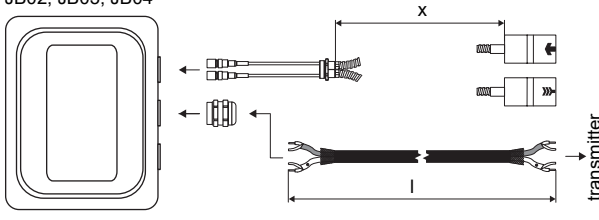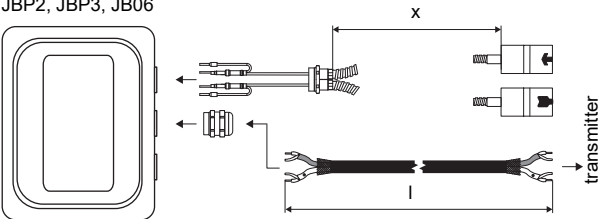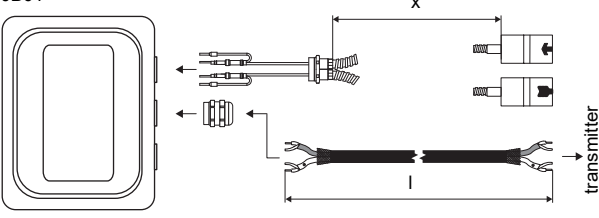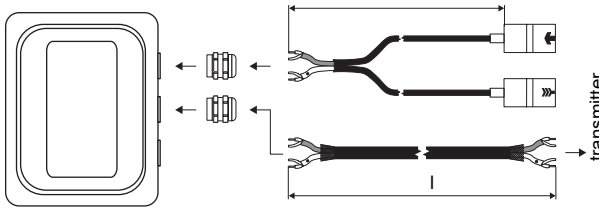
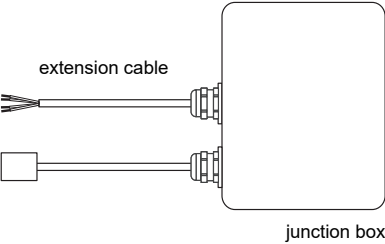
for further data see Technical specification TS_F7xx-transducersVx-xxx_Leu

Connection systems

connection system TS		
connection with extension cable	direct connection	transducers technical type
JB02, JB03, JB04 		*****52
connection system T1		
connection with extension cable	direct connection	transducers technical type
JBP2, JBP3, JBP6 		*****N53 *****E53 *****S53
JB01 		*****8*
JB01, JBP2, JBP3 		*****L*

for further data see Technical specification TS_F7xx-transducersVx-xxx_Leu

Temperature Probes

PT12N		PT12F
item number: <ul style="list-style-type: none">• 770415-1• 770414-2 (matched)	item number: <ul style="list-style-type: none">• 770415-1A2• 770414-1A2 (matched)	item number: <ul style="list-style-type: none">• 770415-2
<ul style="list-style-type: none">• Pt100• clamp-on• -30...+250 °C	<ul style="list-style-type: none">• Pt100• clamp-on• -30...+250 °C• ATEX, UKEX	<ul style="list-style-type: none">• Pt100• clamp-on• -45...+250 °C• response time: 8 s
direct connection		
		
connection with extension cable		
		

see Technical specification TS_PTVx-xxx_Leu

For more information: **Emerson.com**

© 2025 Emerson. All rights reserved.

Emerson Terms and Conditions of Sale are available upon request.
The Emerson logo is a trademark and service mark of Emerson Electric Co. Flexim is a mark of one of the Emerson family of companies. All other marks are the property of their respective owners.

FLEXIM

